

# Bilge pumps

TOPLICHT Art-Nr. 1768-039 Model 11723  
 Art-Nr. 1768-038 Model 11722

Corrosion, electrolysis and fuel resistant bilge pumps. Of rugged construction, they produce high capacity output with the convenience of many mounting positions (see drawings).



A



B



C




B.Leglatin ©

- Self-priming and leak free.
- Quick release inspection cover for added safety.

Model Photo	Single action A	Single action B shown on photo with outlet elbows.	Double action C
Reference of pumps	<b>11723</b>	<b>11722</b> supplied without outlets. See below.	<b>11724</b>
Kit of 2 straight outlets (a) Kit of 2 outlet elbows (b)	Built-in outlets.	<b>17491</b> <b>17492</b>	Outlets supplied with pump.

The double action pump is equipped with outlet elbows, swivelling on 220°, thus allowing all mounting positions and reducing the clearance required (290 mm to 400 mm maximum). The outlet elbows are screwed and fitted with an O-ring for perfect watertightness and added safety (quick release facility). Straight outlets 17491 and elbows 17492 can also be mounted on pump C, which allows pumping in two different locations on the boat, while having only one waste water outlet.

Model	Single action 11723	Single action 11722	Double action 11724
Weight	0.965 kg	0.990 kg	1.840 kg
Capacity output at 1 m height	0.80 L per stroke*	0.80 L per stroke*	1.3 L per stroke*
Maximum lift	3 m	3 m	3 m
Hose diameter	38 mm	38 mm	38 mm

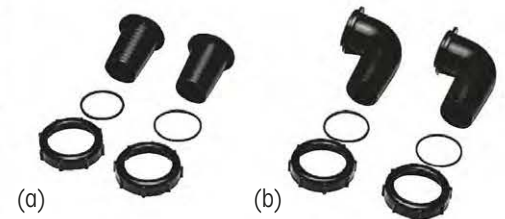

Choice of outlets for single action pump 11722.

\*± 0.05 L


## Parts common to the 3 pumps

- Cover alone : **12611**
- Spare handle, length 40 cm : **14315**
- Hose diameter 38 mm : **16216**
- Handle stowage clips : **16702**
- Screw cap for back part of pump : **18040**




- Watertight gasket with cover complying with IOR rule : **14263** (see drawing)


Single action without watertight gasket

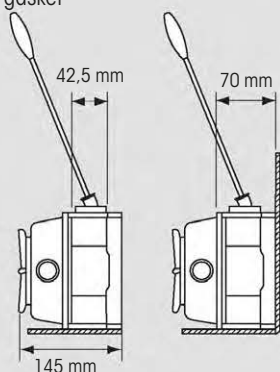

Single action with watertight gasket

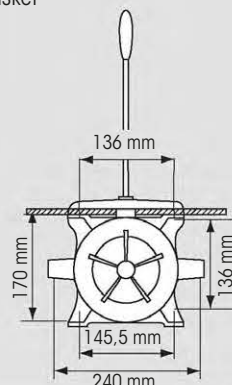

Double action without watertight gasket

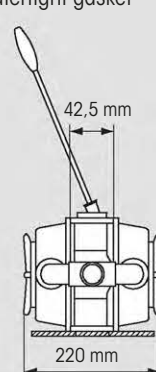

Double action with watertight gasket

